



# mGuide MP2-SKC Synchroniser

## Device Diagram

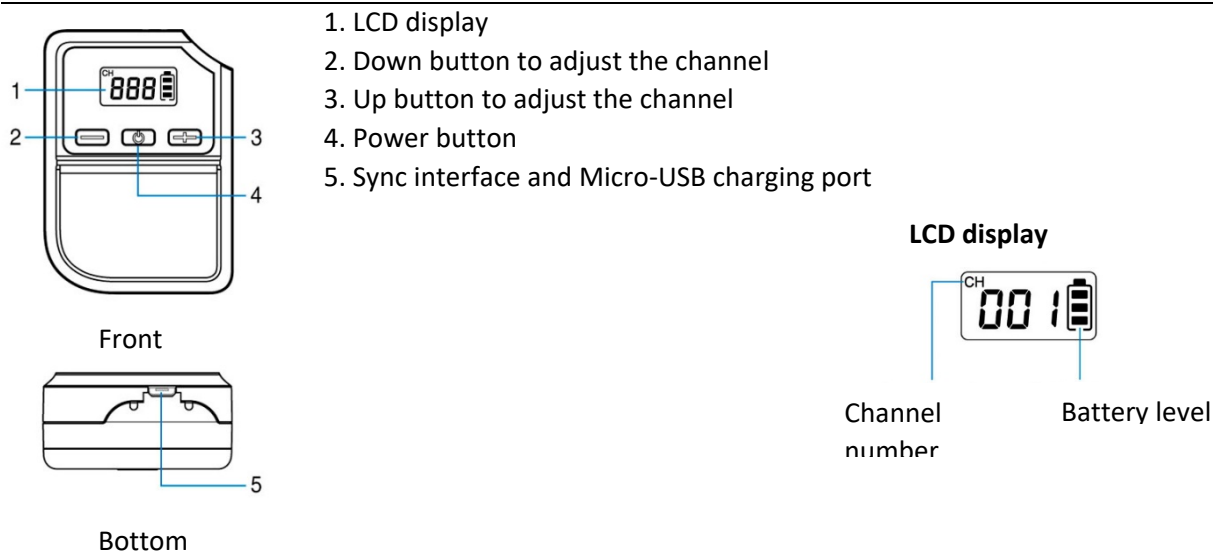


## Synchronisation process



- ⇒ Connect the DCH-12U/24U charger to the power supply.
- ⇒ Insert mGuide Pellegrino2 receivers/transmitters in the charger. Leave one free slot in the charger for the mGuide MP2-SKC synchroniser




- ⇒ Start mGuide MP2-SKC by pressing and holding the power button for about 3 seconds (4).
- ⇒ After starting the synchroniser, select the channel synchronisation mode:

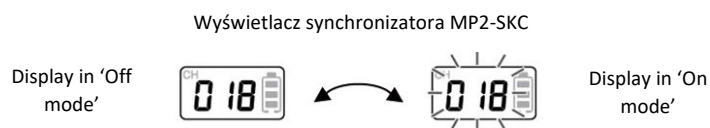

- a) **Off mode** – mGuide Pellegrino2 devices will turn off automatically after synchronisation.
- b) - Use the '-' and '+' (2.3) buttons to select the desired channel on which the devices should work.

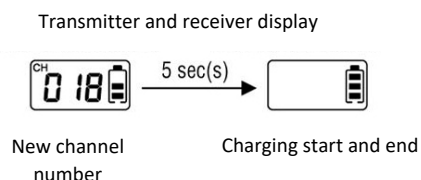

- Press and hold the '-' and '+' buttons simultaneously for about 3 seconds to confirm the selected channel (LCD display should stop flashing).

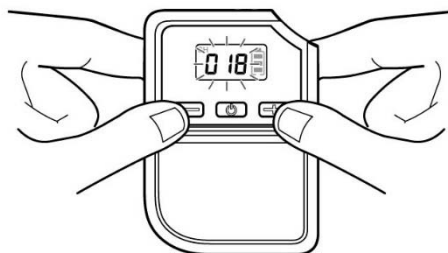


b) **On mode** – mGuide Pellegrino2 devices will turn on automatically after synchronisation.  
 - Use the '-' and '+' (2.3) buttons to select the desired channel on which the devices should work (LCD display should continue to flash).

Transmitter and receiver display



New channel number and display  
before restarting

⇒ After selecting the channel synchronisation mode, insert mGuide MP2-SKC in a free slot in the charger. The LCD displays on the devices will flash quickly (approx. 5 times). The flashing will stop, which means a correctly conducted channel synchronisation process in mGuide Pellegrino2 devices.

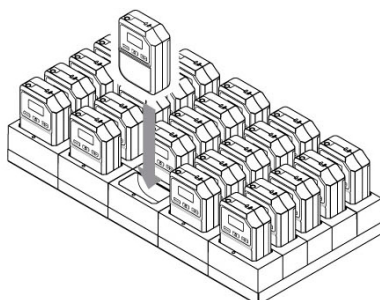

Red LEDs in the charger: devices are charging

Green LEDs in the charger: devices are charged

⇒ After 5 minutes of synchronisation, mGuide MP2-SKC will turn off automatically and start charging if it is still inserted in the charger.

*mGuide MP2-SKC can be removed from the charger immediately after channel synchronisation and turned off by pressing and holding the power button for about 3 seconds (4).*

## Maintenance and Distribution



**Mexpo**  
 ul. Kazimierza Pułaskiego 8  
 81-368 Gdynia

+48 58 550 10 25

+48 22 39 81 699

www.systemtourguide.com  
[office@systemtourguide.com](mailto:office@systemtourguide.com)